



Get more from milk.

FilmTec™ Hypershell™ NF245XD Elements for Dairy Applications

Dairy Ingredients

On a global scale, milk and milk derived dairy products are some of our most important forms of nutrition. Milk is a complex mixture of fats, proteins, lactose, and minerals in water. Concentrating the milk for drinking and separating out the essential ingredients, such as milk powder, whey protein, lactose, and other nutrients, enables products from milk and cheese to infant formula and protein shakes.

Demand for dairy ingredients continues to grow globally supported by the increasing number of health-conscious consumers, the ready availability of dairy products, high income levels across developing economies and increasing investment by food companies to launch new dairy products.

Enabling Processing of Dairy Ingredients

Dairy processing may involve several separation, concentration, and purification steps requiring nanofiltration, reverse osmosis membranes, and ion exchange resins.


Nanofiltration elements are used for the separation of divalent and monovalent ions, making them an excellent choice for separation and demineralization of whey protein and lactose.

Separation and Demineralization of Whey Protein and Lactose

Separation and demineralization of whey protein and lactose requires a nanofiltration membrane that has an appropriate molecular weight cut off to reject organic molecules such as whey protein and lactose but yet is open enough to allow significant transport of monovalent salts.

FilmTec™ Hypershell™ NF245XD elements help enable long-lasting separation and demineralization from milk and whey streams that maximizes operational efficiency.

Separation and demineralization of milk and whey streams.

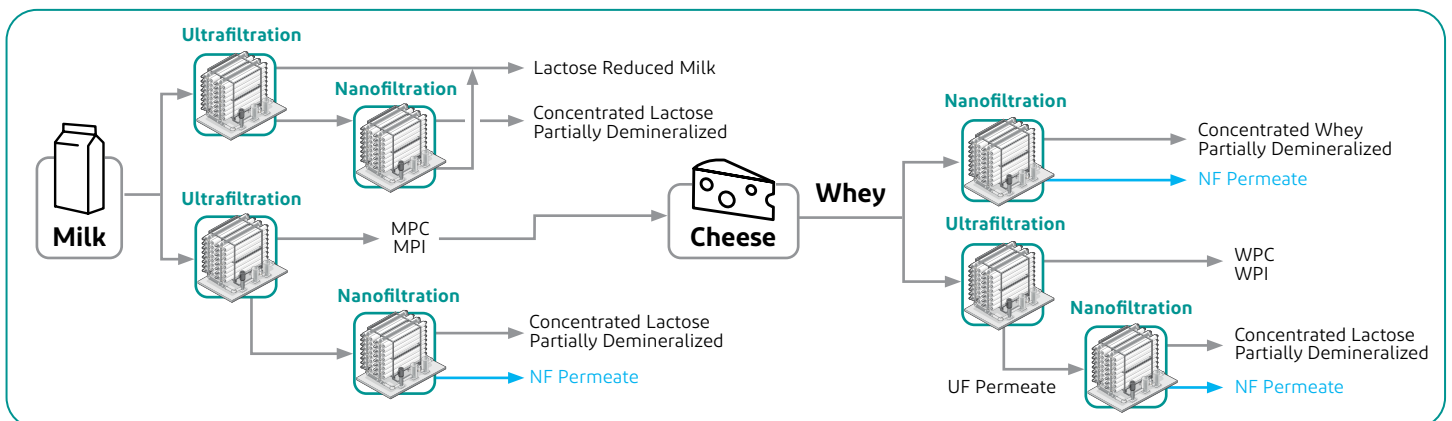

FilmTec™ Hypershell™ NF245XD Element Portfolio that is Built to Last without Compromising Performance



Longer Service Life



Enhanced Chemical Resistance



Improved Permeability

FilmTec™ Hypershell™



Industry Leading Membrane Quality



Less Frequent Replacements

Note: Performance depends on the characteristics of each milk and whey plant. Always follow DuPont's recommended operation and cleaning guidelines which can be found on the [product data sheet](#)

Unlock durable performance even in challenging conditions.

Nanofiltration FilmTec™ Hypershell™ elements now have up to 20% longer service life compared to competitive NF elements. This is achieved by having an improved membrane chemistry expertly engineered to endure the stress caused by the demanding conditions of daily cleanings.

Achieve improved product yields.

The key to improved yields is in the stability of the membrane. FilmTec™ Hypershell™ NF245XD elements are designed to maintain rejection and concentration performance during the element's service life. This results in less product loss during operations and reduced production downtime compared to competitive NF elements.

Experience high efficiency.

New membrane chemistry with enhanced permeability enables up to 10% more productivity vs competition due to increased flow through the membrane which can translate to lower energy consumption.

Less Hassle and Inconvenience.

Products that last, contribute positively to cost and time savings associated with replacing elements, helping to prolong replacement cycles.

DuPont NF Product Portfolio

Short Name	Name	Feed Spacer (mi)	Outer Wrap	ATDs included	Rating max	Cleaning limits
NF245XD	FilmTec™ Hypershell™ NF245XD-8038-FF	33	Outer shell	No	50°C/ 54.8bar	pH 1.8-11 at 50°C
	FilmTec™ Hypershell™ NF245XD-8038/48-FF	48	Outer shell	No		
	FilmTec™ NF245XD-3838/30-FF	30	Mesh Wrap	No		
	FilmTec™ Hypershell™ NF245XD-3838/48-FF	48	Outer shell	No		
	FilmTec™ NF245XD-3840/30-FF	30	Mesh Wrap	No		
NF	FilmTec™ Hypershell™ NF-8038-FF	33	Outer shell	No		
	FilmTec™ NF-3838/30-FF	30	Mesh Wrap	No		
	FilmTec™ NF-3840/30-FF	30	Mesh Wrap	No		



- Full-fit element configuration that minimizes stagnant areas for a sanitary design.
- Sanitizable with peracetic acid or hydrogen peroxide up to 1,000 ppm at 25° C for 20 minutes recirculation (one-twice a week).
- Elements are designed to fit schedule 40, 8-inch stainless pipe (nominal 7.98-inch ID).
- Maximum element dP is 0.9 bar and maximum entire vessel dP is 4.1 bar.
- Maximum element recirculation cross-flow is: 18.2 m³/h (80 gpm) for 8 inch and 6.8 m³/h (30 gpm) for 4 inch elements.



Water Solutions

www.dupontwatersolutions.com

Picture credits: iStock, DuPont Water Solutions

DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with ™, SM or ® are owned by affiliates of DuPont de Nemours, Inc. unless otherwise noted. © 2023 DuPont. All right reserved.

All information set forth herein is for informational purposes only. This information is general information and may differ from that based on actual conditions. Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The product shown in this literature may not be available for sale and/or available in all geographies where DuPont is represented. The claims made may not have been approved for use in all countries. Please note that physical properties may vary depending on certain conditions and while operating conditions stated in this document are intended to lengthen product lifespan and/or improve product performance, it will ultimately depend on actual circumstances and is in no event a guarantee of achieving any specific results. DUPONT ASSUMES NO OBLIGATION OR LIABILITY FOR THE INFORMATION IN THIS DOCUMENT. References to "DuPont" or the "Company" mean the DuPont legal entity selling the products to Customer unless otherwise expressly noted. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED. No freedom from infringement of any patent or trademark owned by DuPont or others is to be inferred.